

Fig. 1

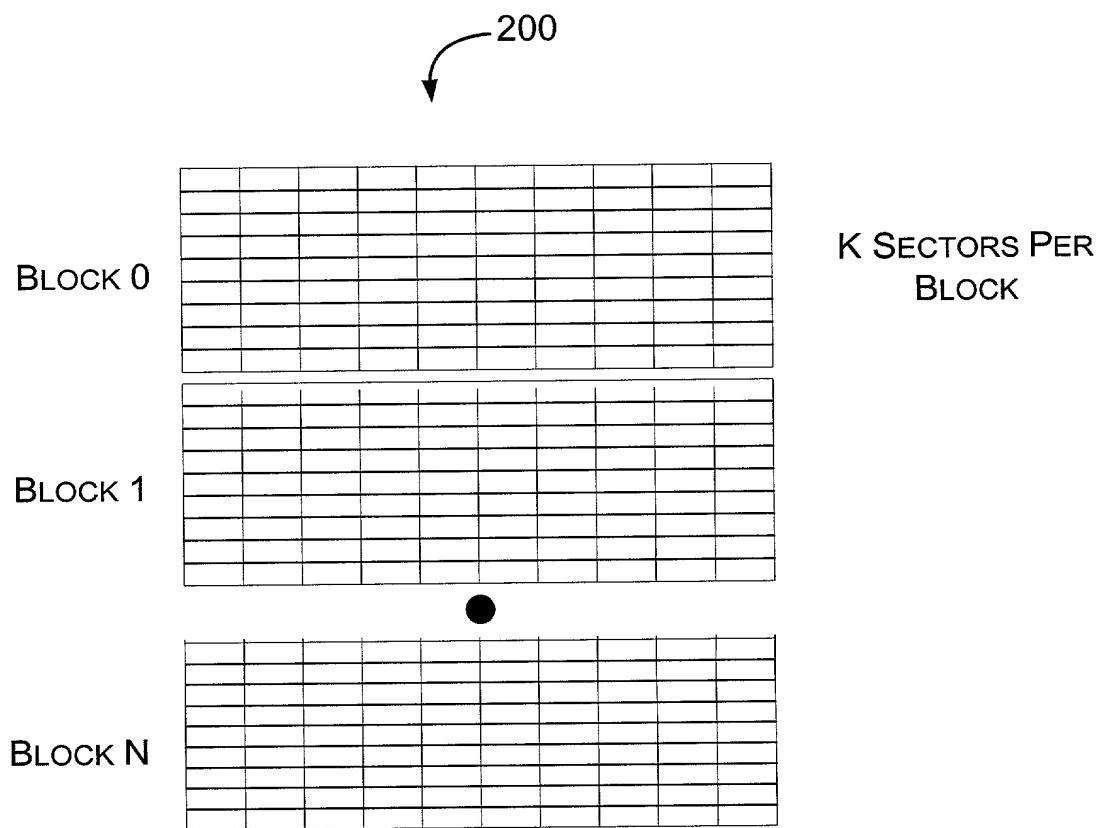


Fig. 2

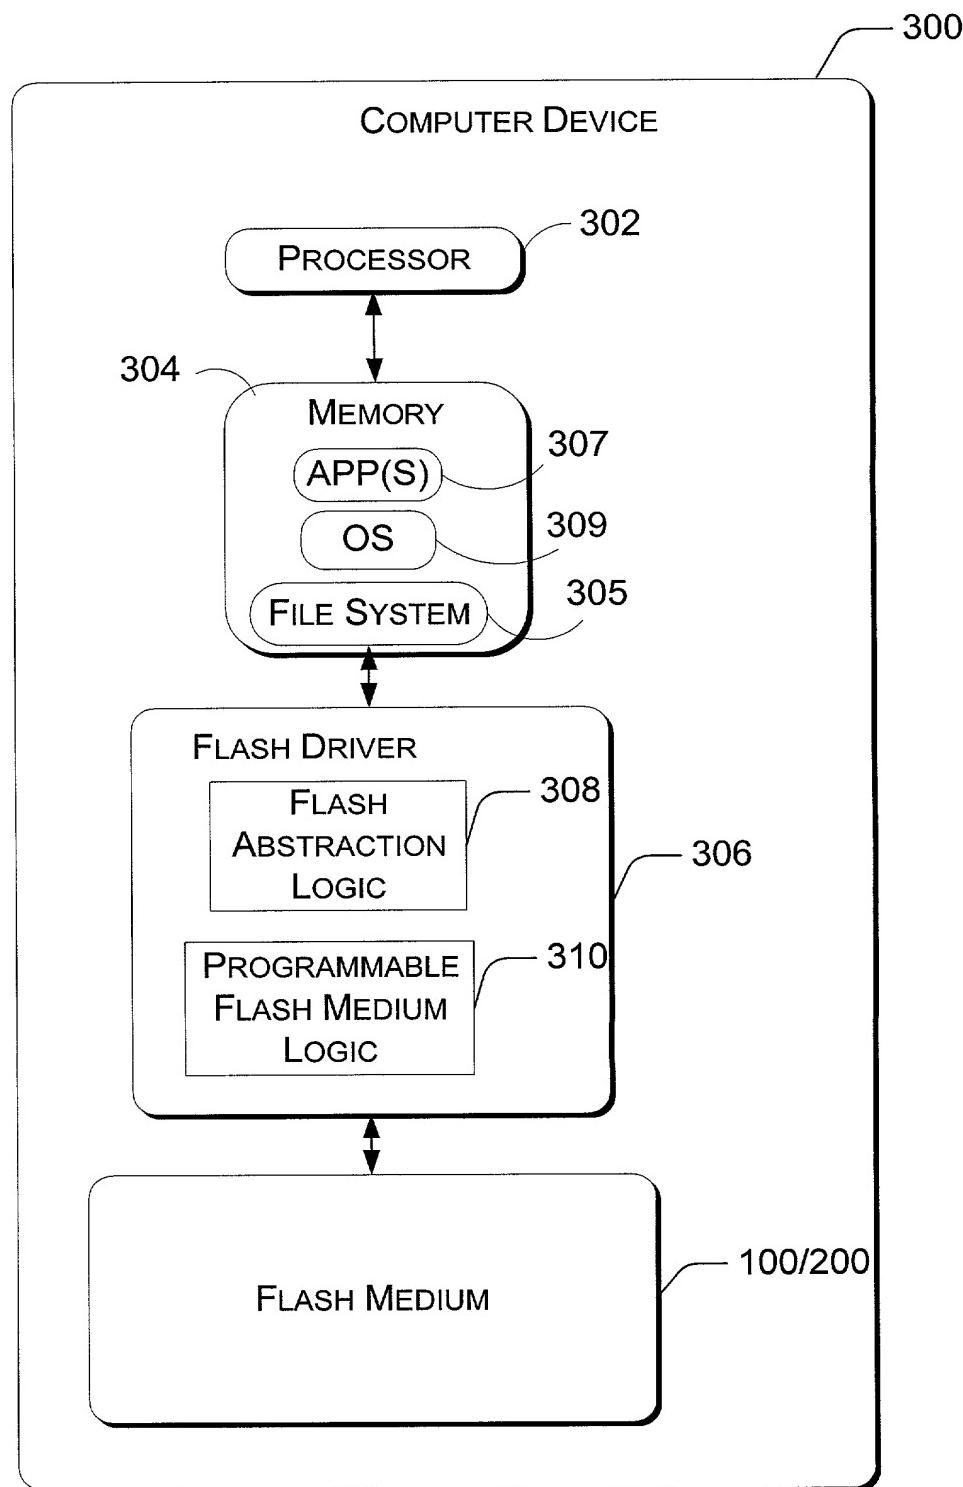


Fig. 3

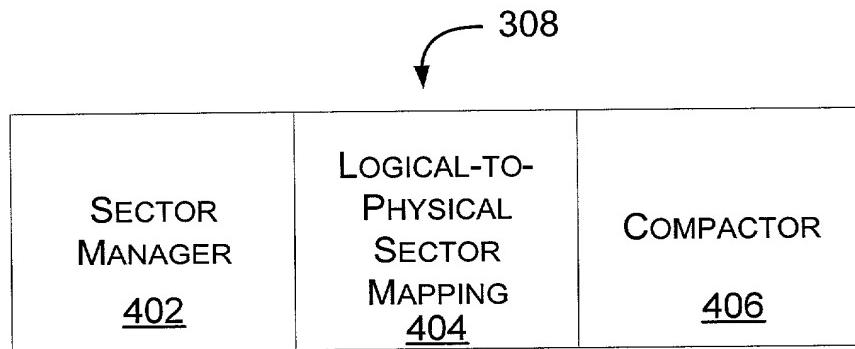


Fig. 4

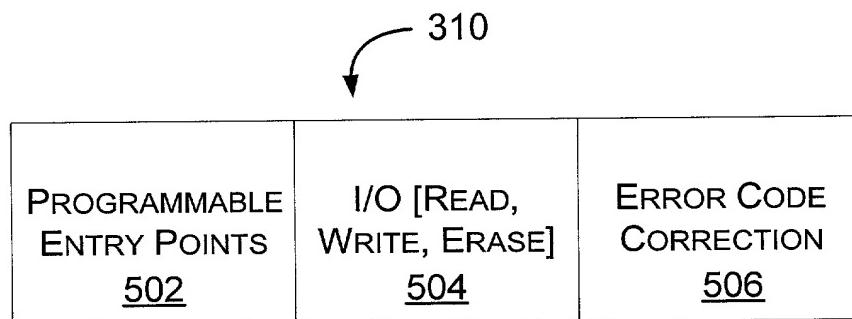


Fig. 5

600A

| PHYSICAL SECTOR | LOGICAL SECTOR |
|--------------------|-------------------|
| <u>602</u> | <u>604</u> |
| 0 | 11 |
| 1 | 12 |
| 2 | 36 |
| 3 | |
| • | |
| • | |
| • | |
| N | |

600B

| PHYSICAL SECTOR | LOGICAL SECTOR |
|--------------------|-------------------|
| 0 | 11 DIRTY |
| 1 | 12 |
| 2 | 36 |
| 3 | 11 |
| • | |
| • | |
| • | |
| N | |

Fig. 6A

Fig. 6B

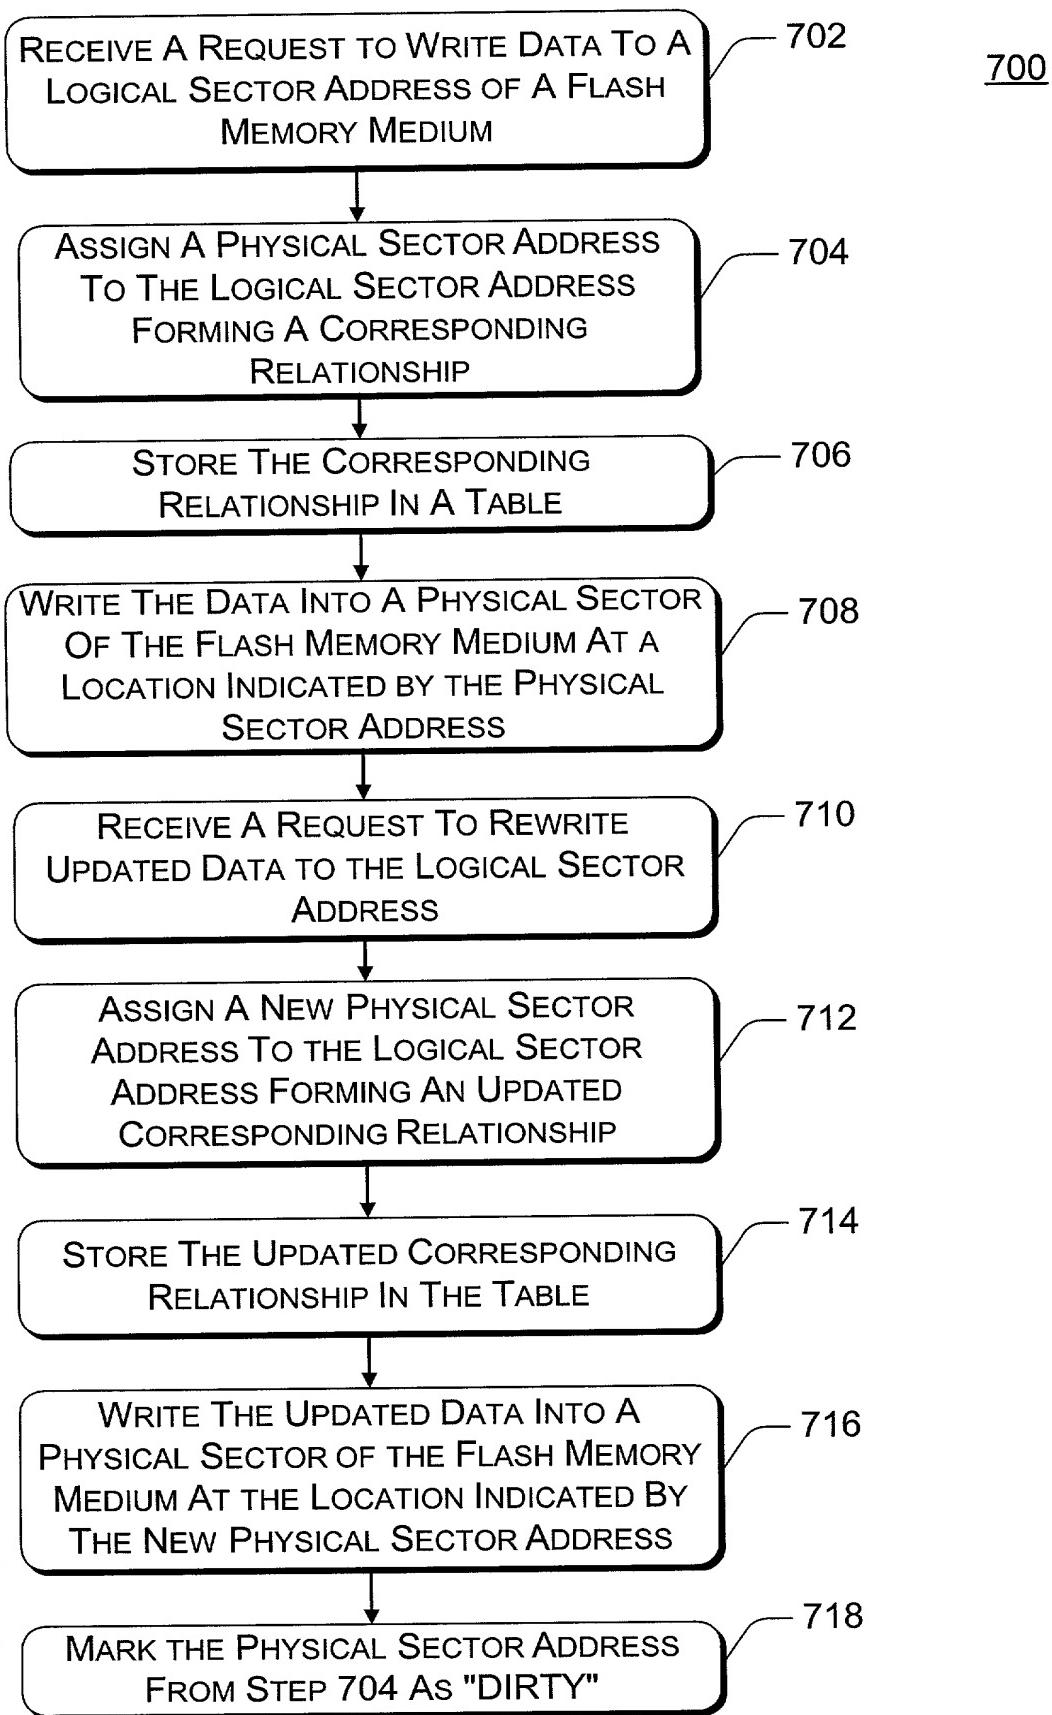


Fig. 7

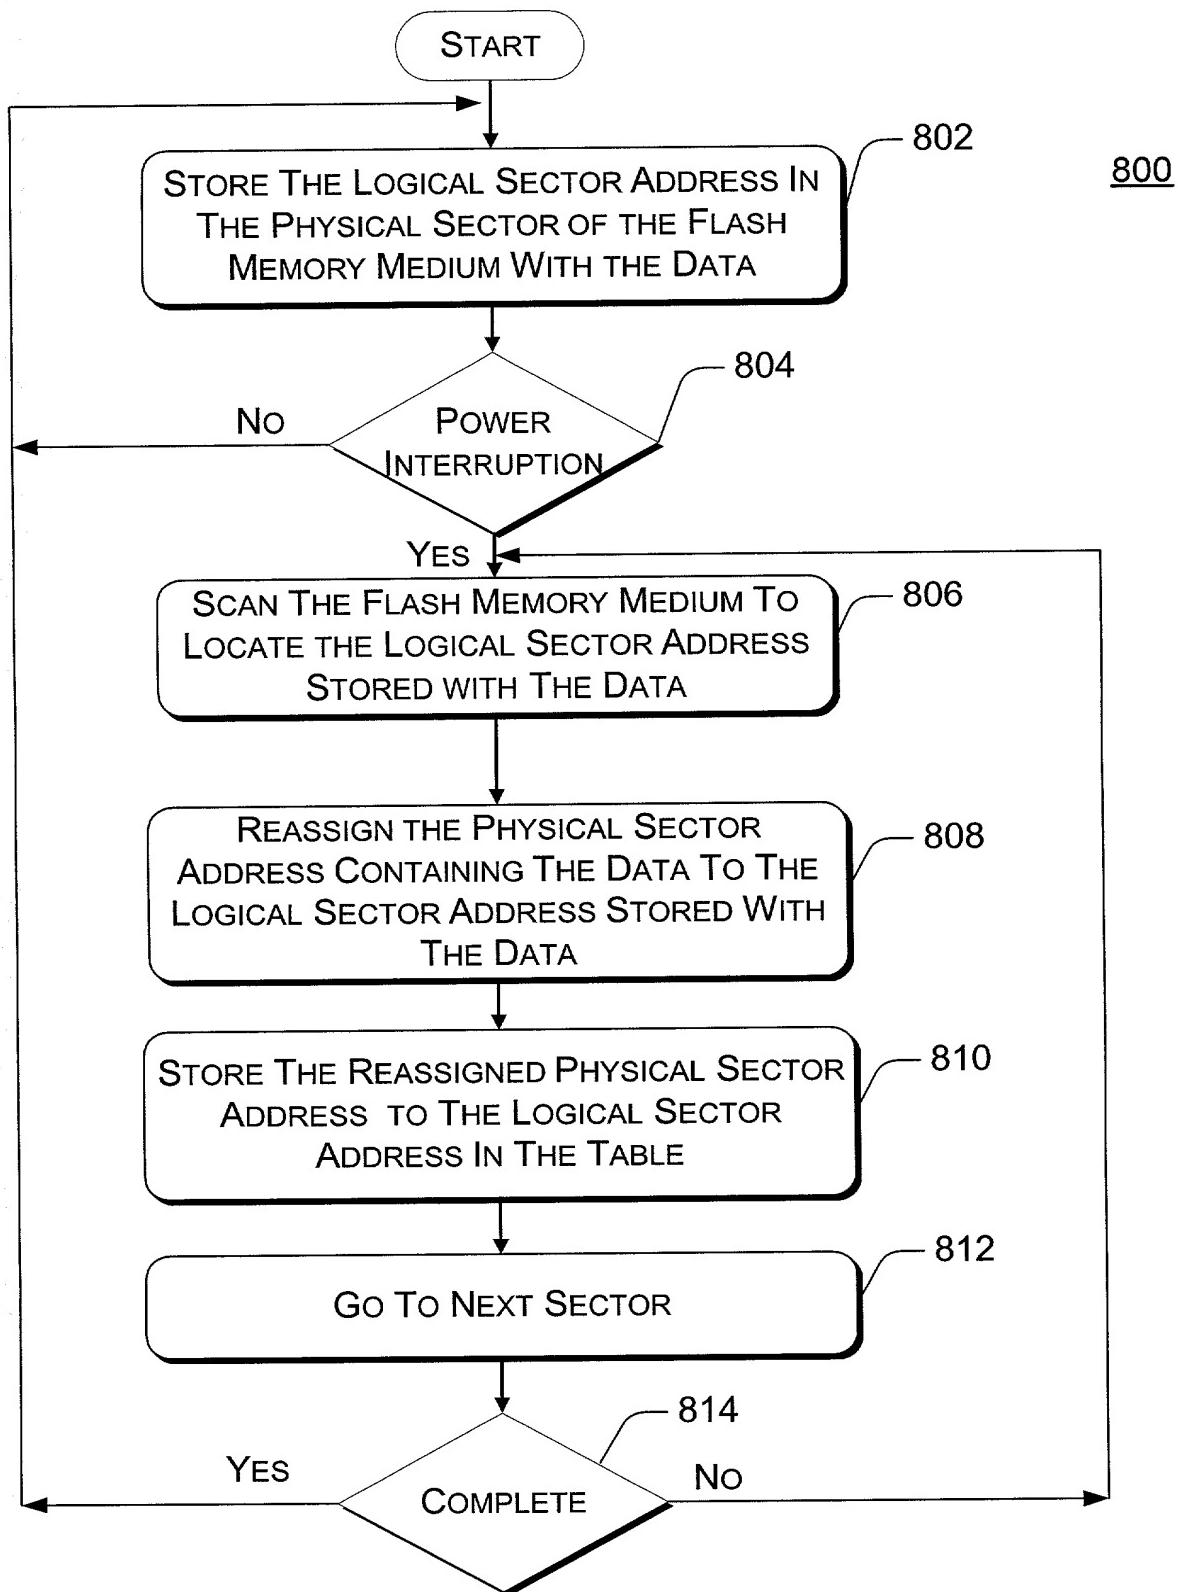


Fig. 8

Docket No: MS1-1026US
Inventor(s): Jered Aasheim, et al.
Title: Open Architecture Flash Driver

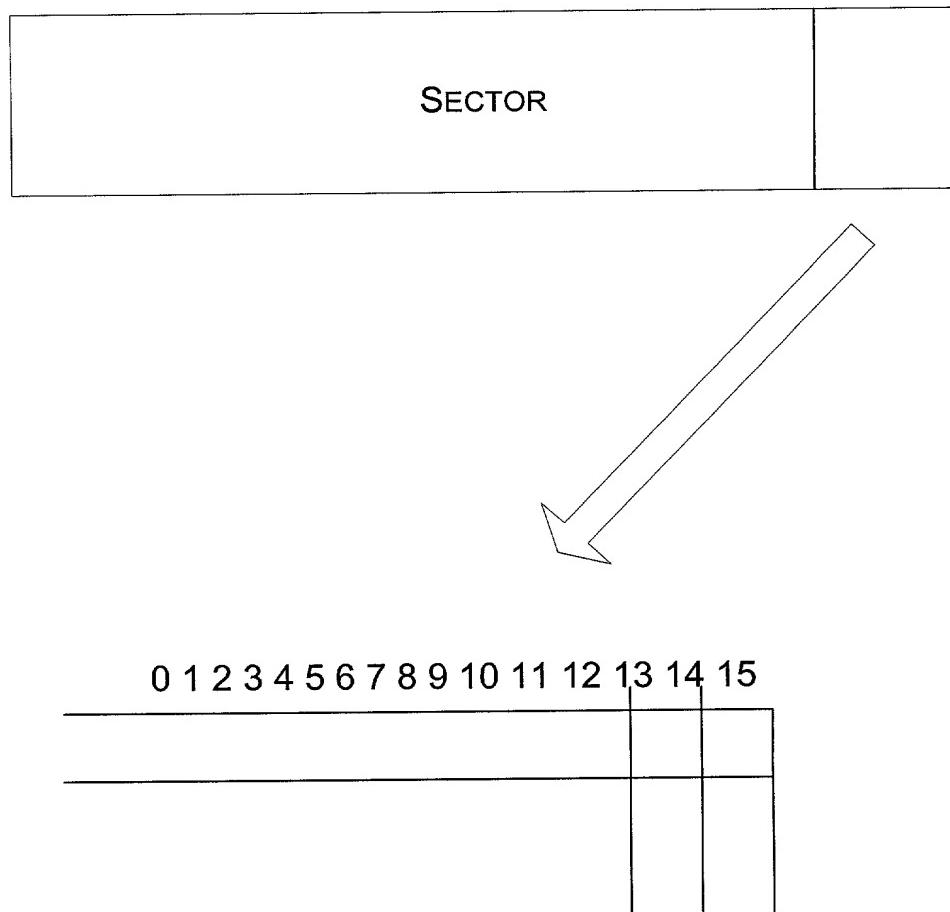


Fig. 9

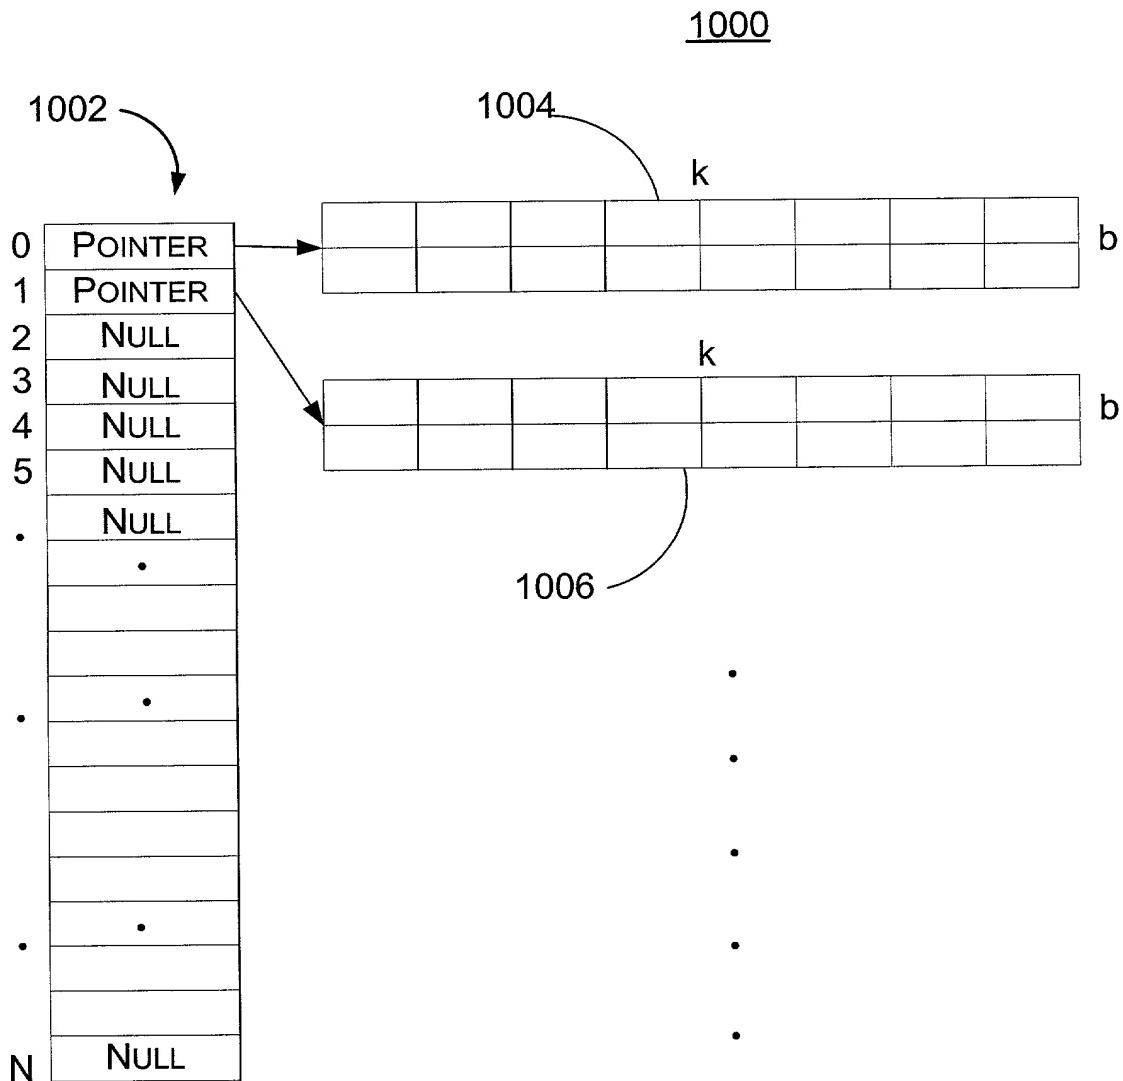


Fig. 10

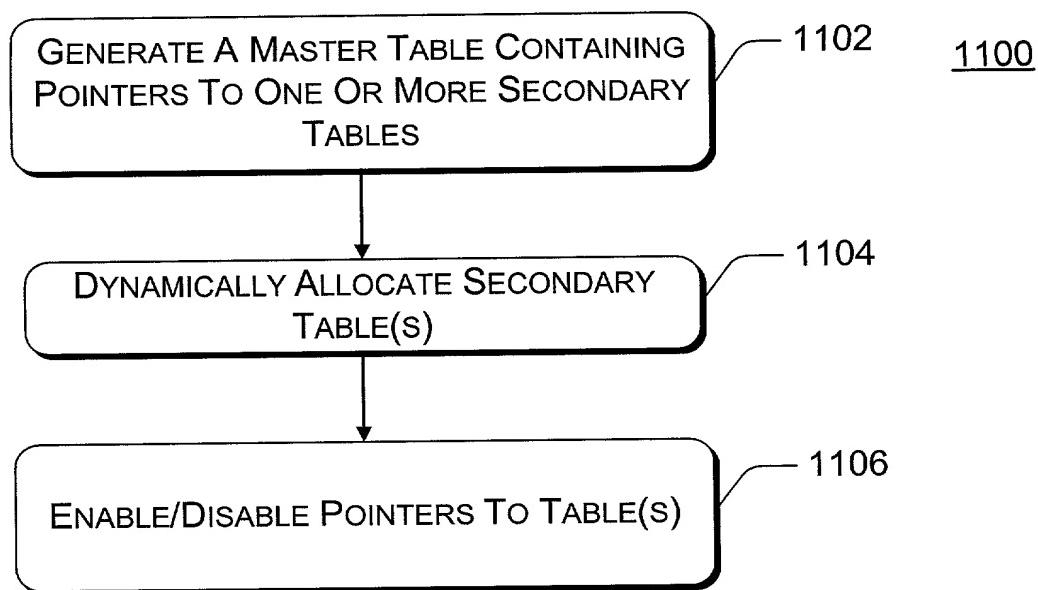


Fig. 11

1200

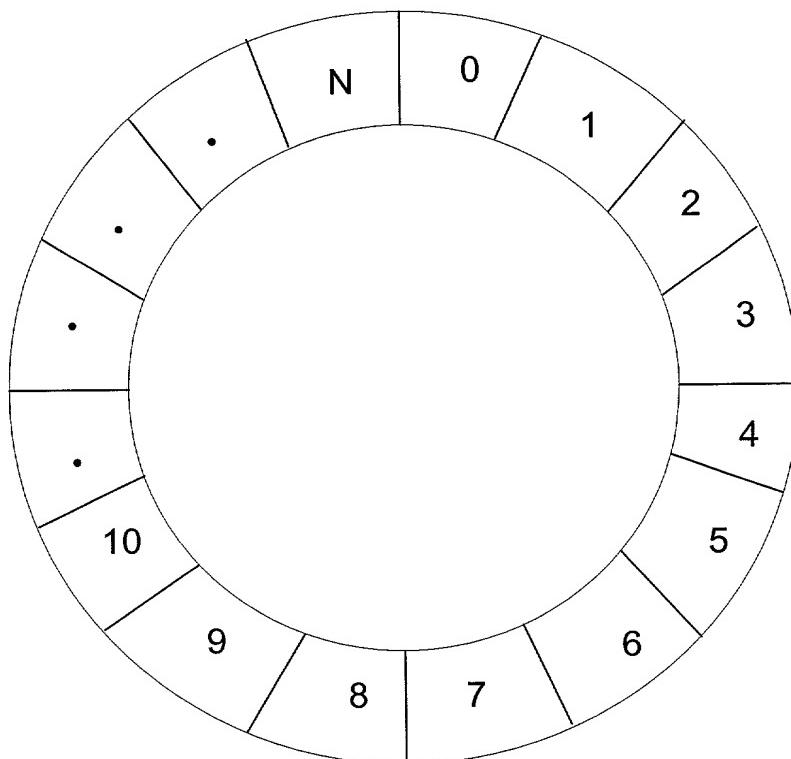


Fig. 12

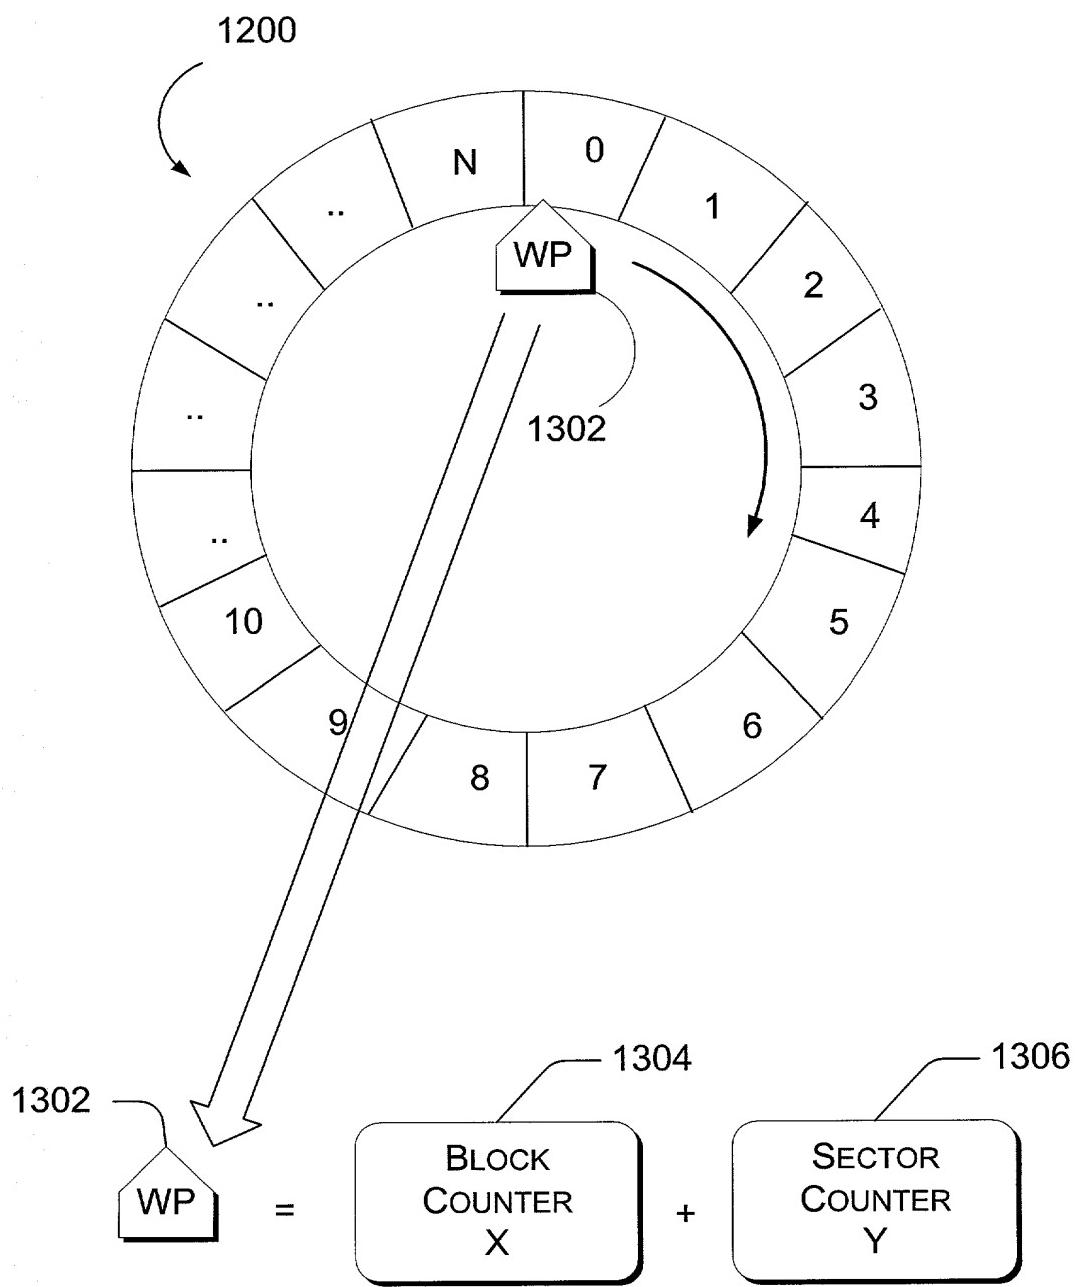


Fig. 13

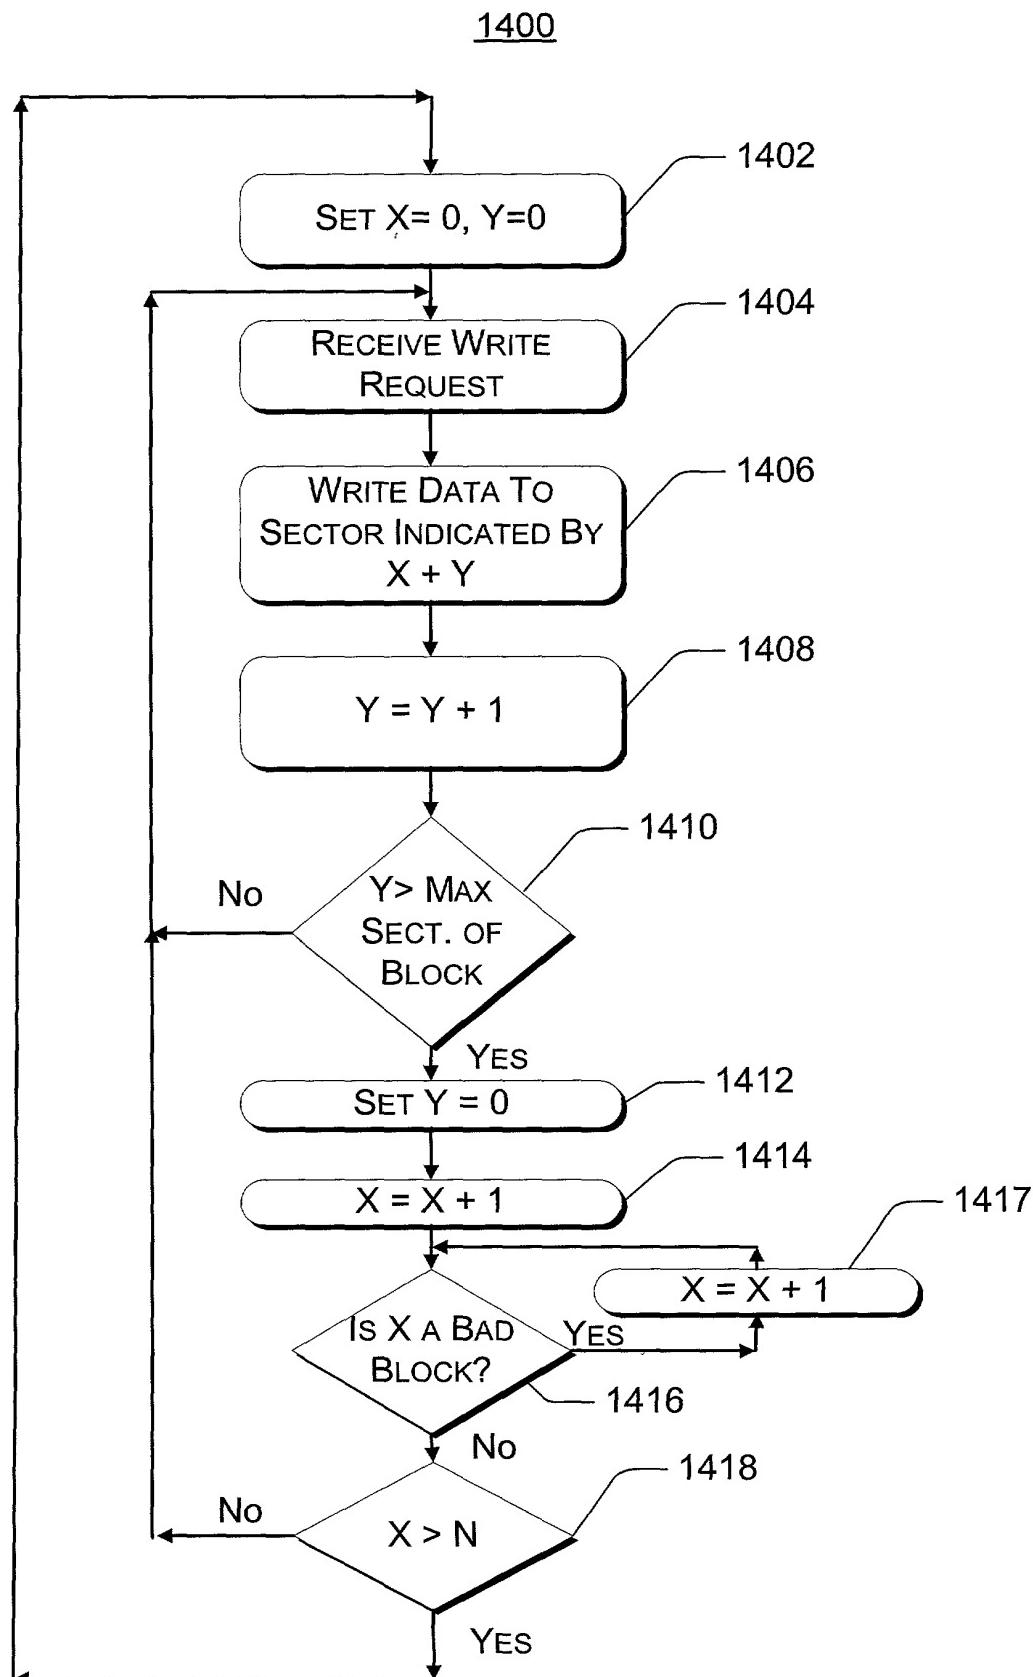


Fig. 14

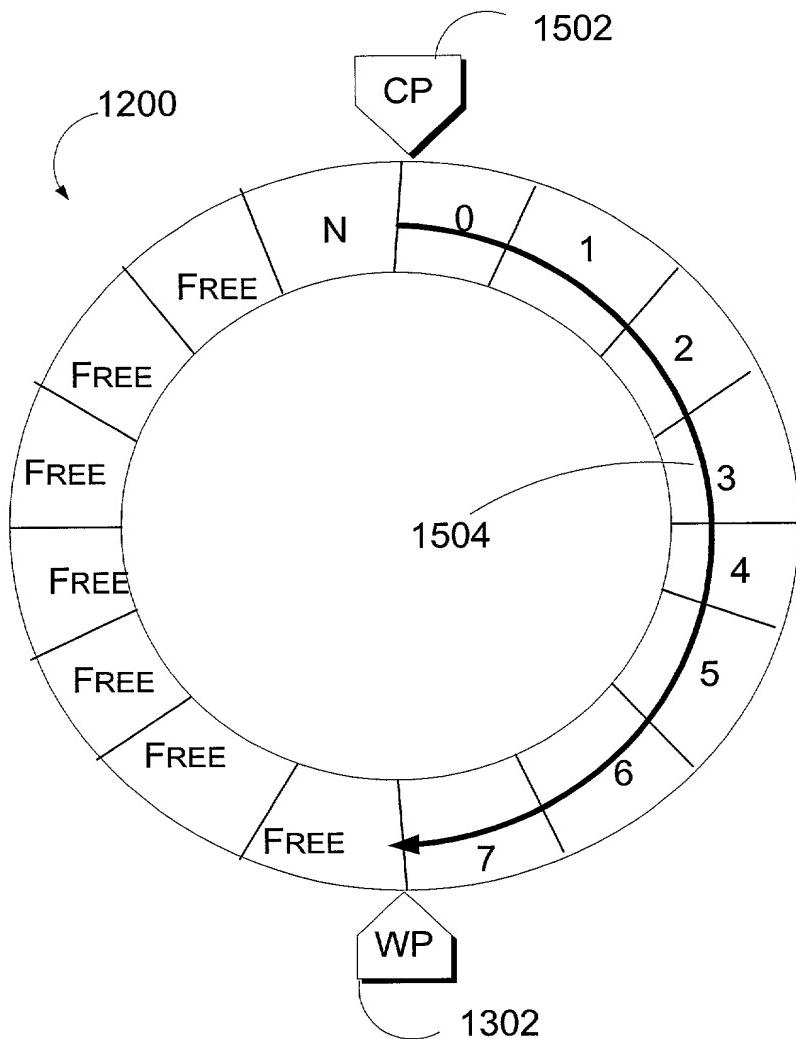


Fig. 15

1600

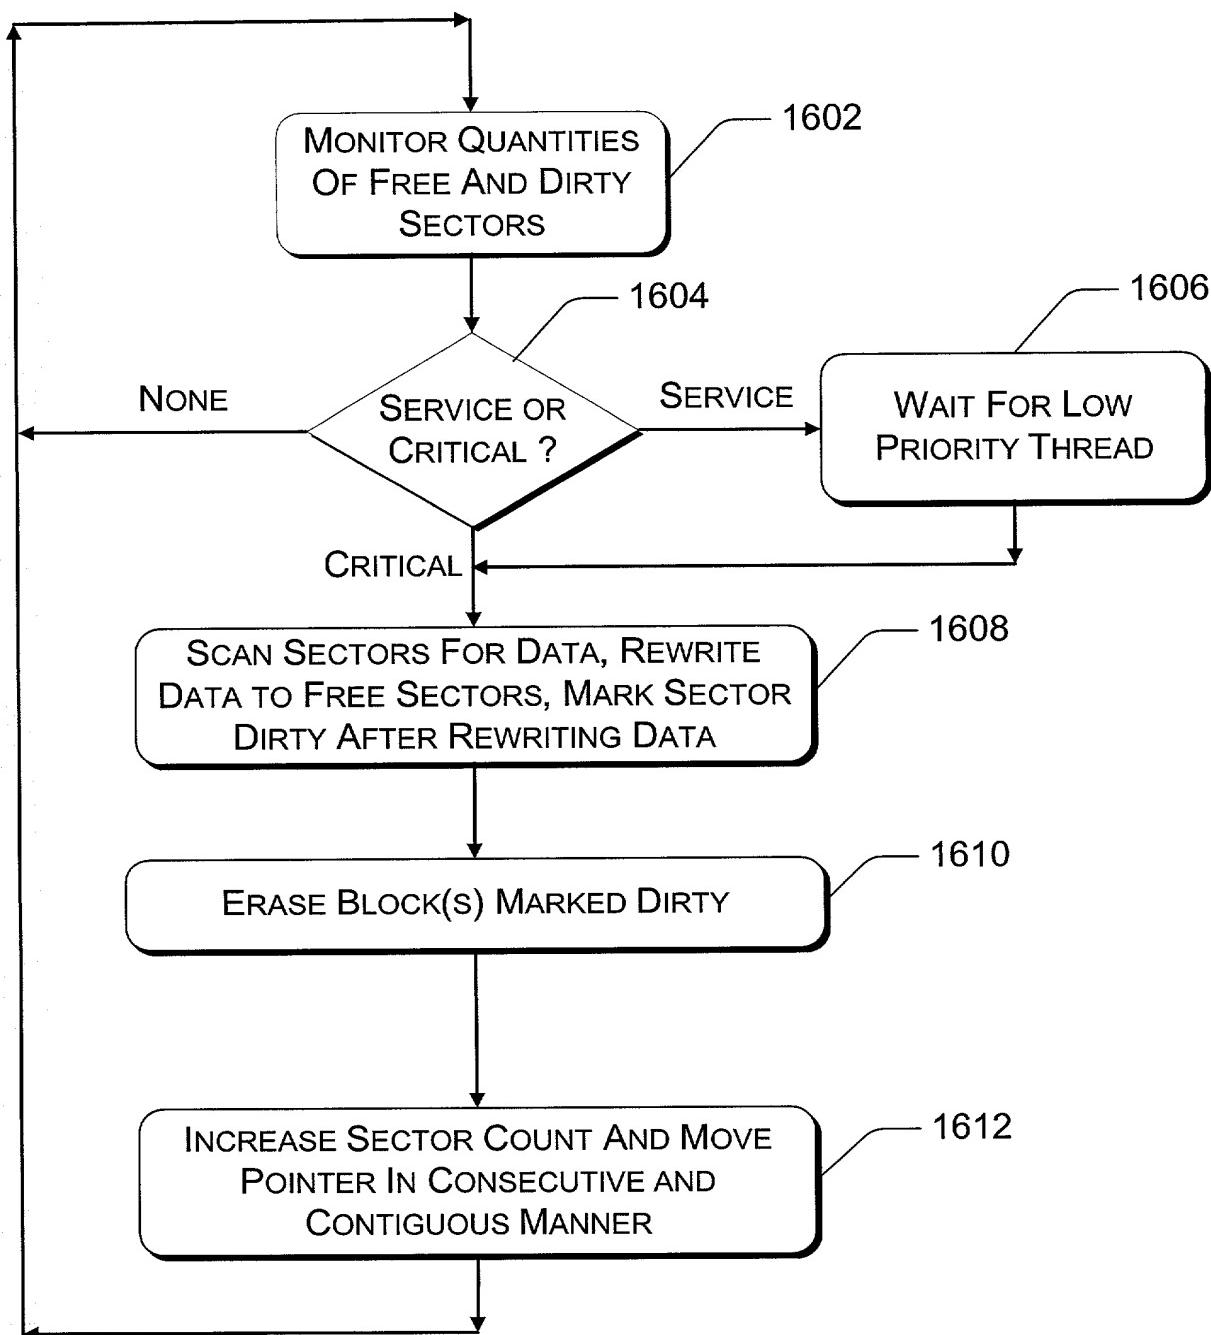


Fig. 16

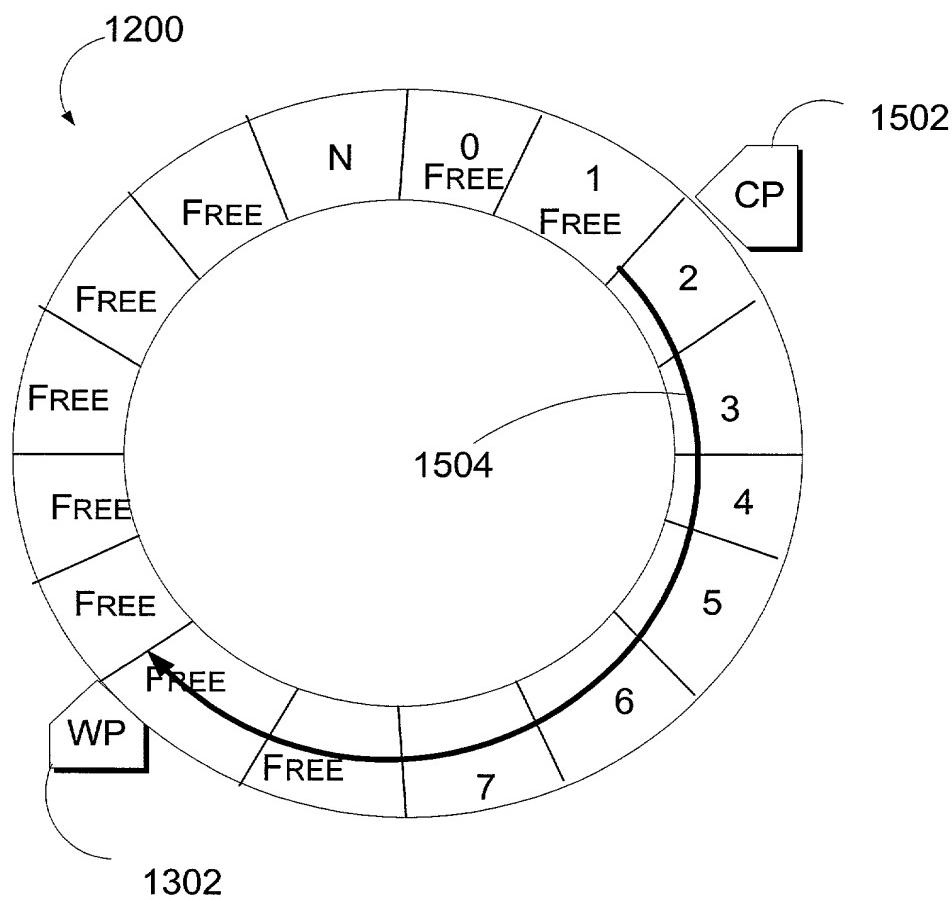


Fig. 17

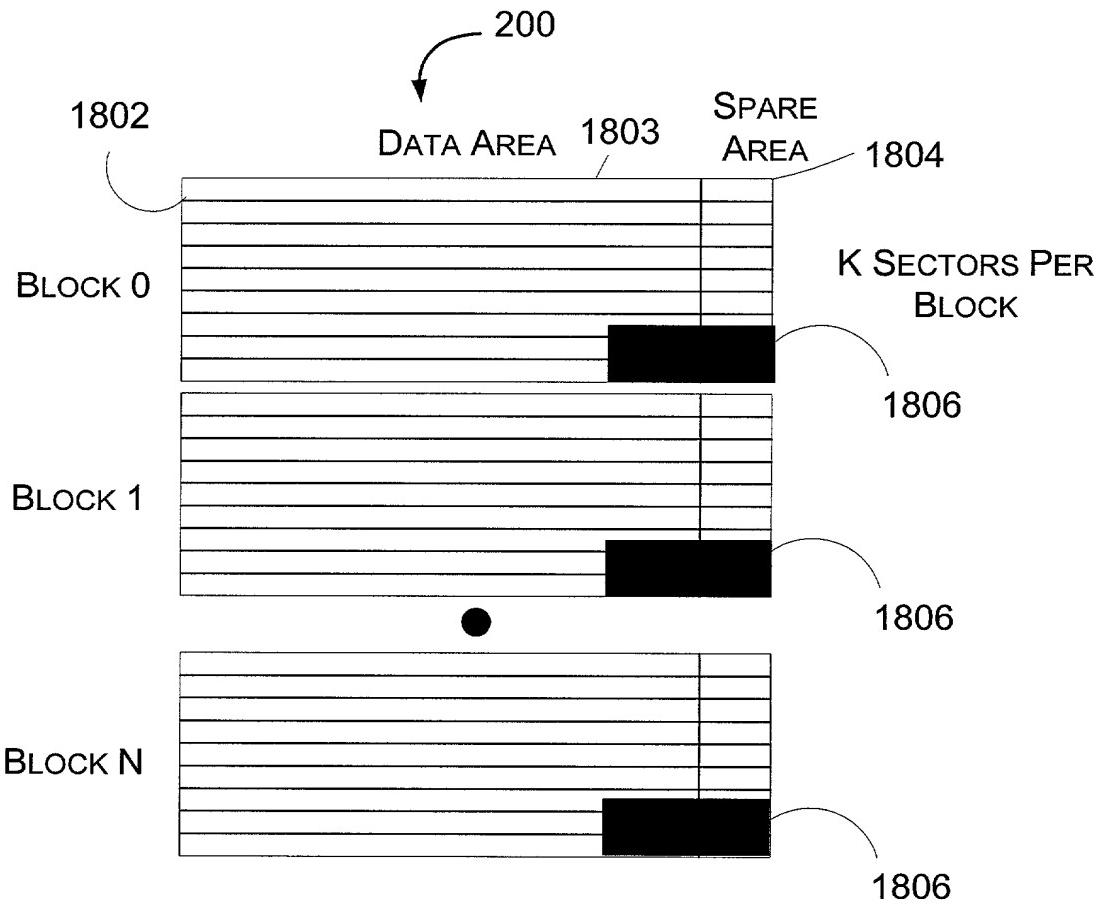


Fig. 18